


DOMINATOR

UV-DISINFECTED WATER SUPPLY

Endless operatory bottle & drinking water supply + optional autoclave water!

- *High-intensity ultraviolet light, reverse osmosis and filtration technologies eliminate viable bacteria, viruses, cysts and spores without the use of chemicals.
- *Produces UV-disinfected, low-mineral water for operatory bottles and drinking water.
- *Produces 2+ gallons per hour.
- *Optional storage tank upgrade from 3 to 10 gallons for larger offices, staff drinking water.
- *Installs in mechanical room (MR) or sterilization center (SC) cabinet.
- *Optional Mini-Mizer refines Dominator's water to mineral-free water for autoclaves & sterilizers.
- *Multiple dispensing options include remote direct dispense gun and stationary red faucet.
- *Economical – Creates quality water onsite for less than the cost of delivered bottled water.
- *Reduce maintenance - Eliminates autoclave scale, increasing boiler energy efficiency.
- *Green – Eliminate energy and landfill waste of distilled water.
- *Labor saving – Eliminates trips to purchase bottled water.
- *Space saving – Reclaim your bottled water storage area.
- *Reduce risk – Eliminate injuries from lifting heavy water bottles.

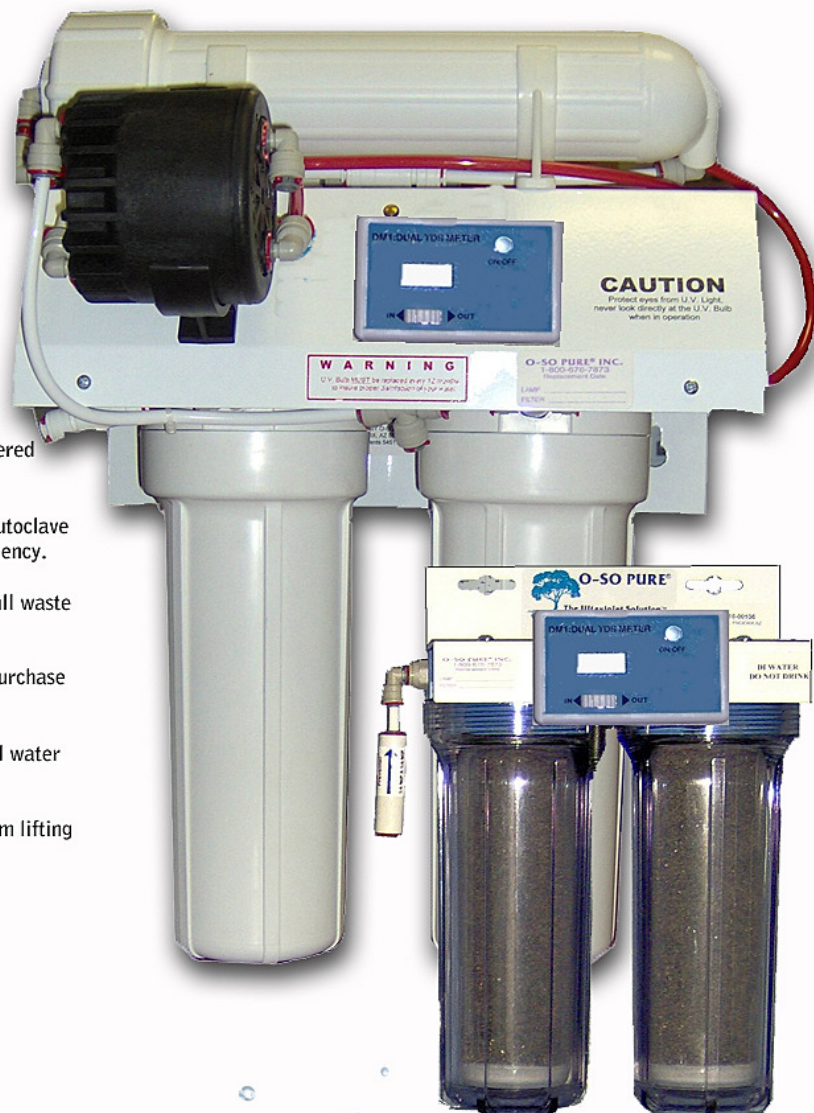

| MODEL | DESCRIPTION | INSTALL IN | TANKS | RO WATER DISPENSE | DI WATER DISPENSE |
|----------|---|---|---|-------------------|-------------------------------|
| DWS-008 | DOMINATOR | Sterilization Center or Mechanical Room | steel 3 gallon | chrome faucet | N/A |
| DWSP-414 | DOMINATOR PLUS | Sterilization Center or Mechanical Room | RO TANK : steel 10 gallon, DI TANK: steel 3 gallon | 2 chrome faucets | remote dispensing gun (15 ft) |
| DWSP-406 | DOMINATOR COMPLETE- for direct connect to dental units, includes waterline disinfection | Mechanical Room | RO TANK : steel 10 gallon, DI TANK: steel 3 gallon | chrome faucet | remote dispensing gun (15 ft) |

specifications:

*Width.....14"
 *Height.....19"
 *Depth.....7"
 *Weight (wet).....20 lbs
 *Tap water pressure.....40 – 100 PSI
 *Tap water temperature.....55-100°F
 *Optimal input temperature.....85°F
 *Tap water IRON.....< 0.3 ppm

*Electrical.....120 VAC
 *UV lamp intensity (new)....35,000 mwS/cm2
 *UV lamp life.....375 days (9,000 hrs)
 *UV lamp intensity.....(375 days) 16,000 mwS/cm2
 *Standard tank.....15" H x 12" Dia x 3 gal
 *Dispense rate (full tank).....1 gallon/minute
 *Warranty.....1 year limited, excluding consumables




DOMINATOR

- WATER STORAGE- steel 3-gallon tank
- DISPENSING- chrome faucet.
- ANNUAL SERVICE- DWS-RPKC
- INSTALL LOCATION- Mount in sterilization center to fill operatory bottles or in equipment room.

OPTIONS

- DWS-BPA-PS: 3/4" PVC bypass & dual electric solenoid water shutoff for DOMINATOR.
- DWS-TKUP-14: 10 gallon water storage tank upgrade recommended for larger dental unit counts or when using for drinking water.

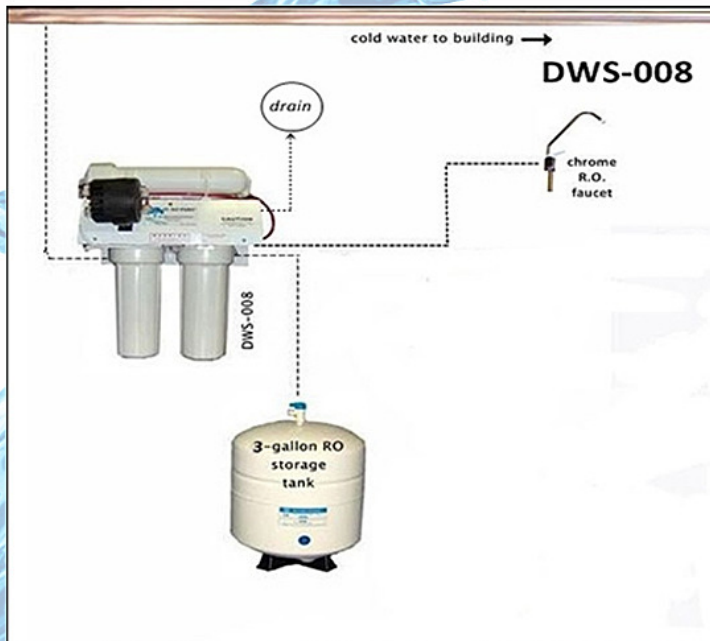


DWS-008

DOMINATOR PLUS

- WATER STORAGE- steel 10-gallon R.O. tank & steel 3-gallon D.I. tank.
- DISPENSING- (2) chrome faucets, D.I. dispensing gun.
- ANNUAL SERVICE- DWS-RPKC & DWS-LRDC2.
- INSTALL LOCATION(s)- Mount in sterilization center or in equipment room. Mount the DWS-DIDG in sterilization center.

OPTIONS

- DWS-BPA-PS2: 3/4" PVC bypass & triple electric solenoid water shutoff for DOMINATOR & MINI-MIZER

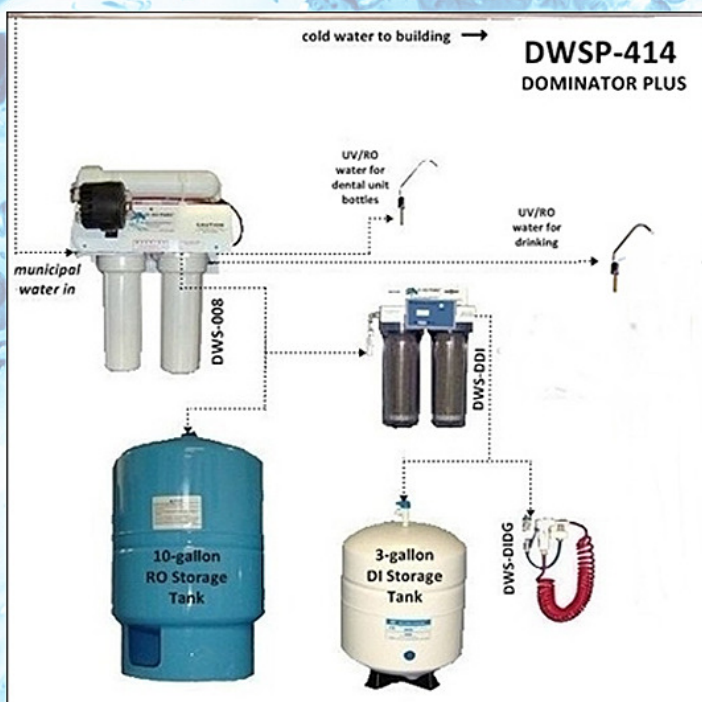


DWSP-414

DOMINATOR COMPLETE

- WATER STORAGE- steel 10-gallon R.O. tank & steel 3-gallon D.I. tank.
- DISPENSING- chrome faucet, D.I. dispensing gun.
- ANNUAL SERVICE- DWS-RPKC & DWS-LRDC2
- INSTALL LOCATION(s)- Mount in sterilization center to fill dental unit bottles or in equipment room (with DWS-DPUP) for RO-resistant dedicated dental unit plumbing. Mount the DWS-DIDG in sterilization center

OPTIONS

- DWS-BPA-PS2: 3/4" PVC bypass & triple electric solenoid water shutoff for DOMINATOR & MINI-MIZER

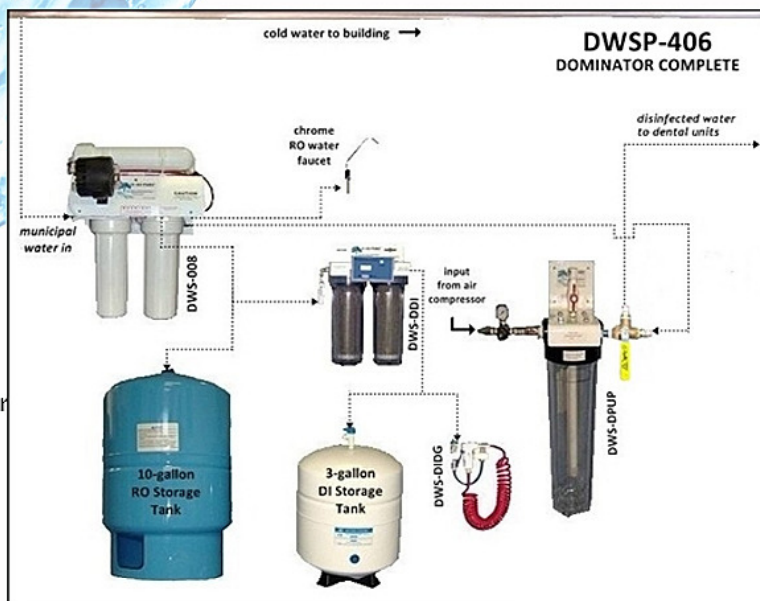

DWSP-406